DRYING STORAGE CABINETS



DRYING & STORAGE CABINETS







Large drying cabinet

ELGA EDO-400 is a drying cabinet of great capacity. To secure even temperature in the cabinet, the heating elements are placed on two levels. The drying temperature is adjustable up to 400°C, with a temperature regulator. The temperature is to be seen digitally on the temperature regulator, which is also provided with a built-in timer. After drying the temperature is automatically reduced to 100°C. This cabinet is supplied with a calibration certificate to comply with the ISO 9001. The cabinet is also provided with removable baskets and it can even be used simply as a storage cabinet.

Small drying cabinet

Thermostat

ELGA SDO-400 is a drying cabinet, whose drying temperature is adjustable up to 400°C, with a temperature regulator. The temperature is shown digitally on the temperature regulator, which is also provided with a built-in timer. After drying the temperature is automatically reduced to 100°C. This cabinet is supplied with a calibration certificate to comply with the ISO 9001. The cabinet is equipped with removable baskets and it can even be used simply as a storage cabinet.

Thermostat	0 – 400°C
Effect	4,2 kW
Voltage *	400 V *
Inner measurements (W x D x H)	700 x 500 x 700 mm
Outer measurements (W x D x H)	820 x 650 x 1200 mm
Weight	170 kgs
Capacity	approx. 300 kgs
Timer	0 – 3600 minutes
Part no.	8064 0000

0 − 400°C

^{* 230} V on request





Large storage cabinet

ELGA ED-150 is a cabinet adapted to "heavy" industry, enabling the storage of considerable quantities of electrodes. The cabinet is provided with lifting eye-bolts to facilitate transportation.

Other effects/thermostat on request.

Thermostat	0 – 150°C
Effect	3,3 kW
Voltage *	230 V *
Inner measurements (W x D x H)	750 x 480 x 700 mm
Outer measurements (W x D x H)	830 x 650 x 1160 mm
Weight	160 kgs
Capacity	approx. 300 kgs
Controllamp	
Part no.	8067 0000

^{* 400} V on request

Small storage cabinet


ELGA SD-150 is designed for the storage of approx. 30-40 electrode packets. The cabinet is provided with lifting eye-bolts to facilitate transportation. Other effects/thermostat on request.

Thermostat	0 – 150°C
Effect	835 W
Voltage	230 V
Inner measurements (W x D x H)	400 x 500 x 500 mm
Outer measurements (W x D x H)	520 x 620 x 880 mm
Weight	60 kgs
Capacity	120 kgs
Controllamp	
Part no.	8063 0000

Portable storage canister

ELGA HP 1 is an insulated storage canister of very high quality, manufactured in polished, stainless 18/8 steel, enabling it to be used in tough environments, such as shipyards, offshore etc.

Part no.	8062 0000
Capacity	approx. 2 electrode packets
Weight	6 kgs
Outer measurements (W x D x H)	150 x 180 x 500 mm
Inner measurements (W x D x H)	110 x 90 x 450 mm
Voltage *	230 V *
Effect	180 W
Thermostat	Fixed at 100°C

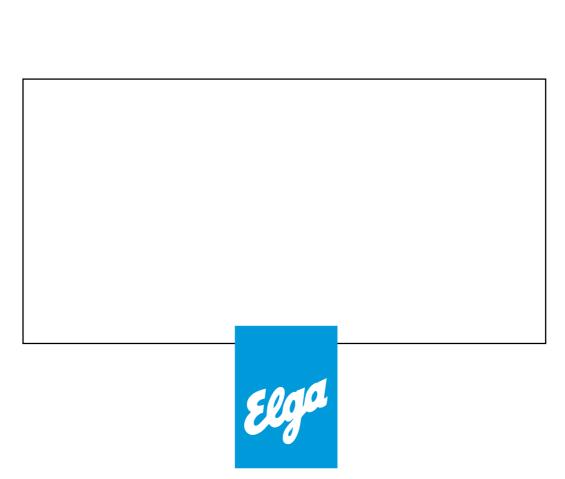

Elga AB

Box 277, SE-433 25 Partille, Sweden Tel: +46 31 726 46 00, Fax: +46 31 726 47 00 Internet: www.elgawelding.com